




NEW SERIE EUROPA

SELF-PRIMING PUMP

- Self-priming electric pump for swimming pools, with built-in pre-filter of great capacity.
- Pre-filter with transparent lid in polycarbonate which allows easy observation of the pre-filter basket. The pre-filter is closed with a knob system of easy accessibility.
- Pump body made in polypropylene reinforced with fibreglass, resistant to the chemical products in the swimming pool, guaranteed to last a long time.
- Pump body lid and diffuser in Noryl. Impeller in Noryl with shaft in stainless steel.
- Mechanical seal in graphite and ceramics.
- Motor shaft manufactured in stainless steel AISI 316L.


پمپ های سری EUROPA

- جنس بدنه: پلی پروپیلن تقویت شده با فایبرگلاس
- مقاومت بالا در برابر مواد شیمیایی
- جنس پروانه: نوریل (پلی فنیل اکساید + پلی استیرن)
- مکانیکال سیل: گرافیت + سرامیک دارای پیش فیلتر
- با ظرفیت بالا و درپوش شفاف
- شفت موتور: استیل ۳۱۶L (AISI)
- اتصالات تقویت شده با حلقه استیل
- استیل ۳۱۶L ضد زنگ نگیر و بسیار مقاوم در برابر خوردگی با اسیدها (بخصوص کلر) می باشد.

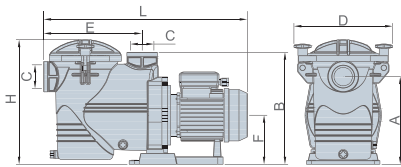

CODE	POWER		DIMENSIONS								WEIGHT GROSS Kg	VOLUME m³
	kW	CV/HP	A	B	C	D	E	F	H	L		
SE2N050M SE2N050T	0,37	1/2	235	300	2"	290	264	132	335	545	12,4	0,072
SE2N075M SE2N075T	0,55	3/4	235	300	2"	290	264	132	335	545	12,9	0,072
SE2N100M SE2N100T	0,75	1	235	300	2"	290	264	132	335	545	13,9	0,072
SE2N150M SE2N150T	1,10	1,5	235	300	2"	290	264	132	335	570	16,9	0,072
SE2N200M SE2N200T	1,50	2	235	300	2"	290	264	132	335	585	19,4	0,072
SE2N300M SE2N300T	2,20	3	235	300	2"	290	264	132	335	605	22,4	0,072


SE2N

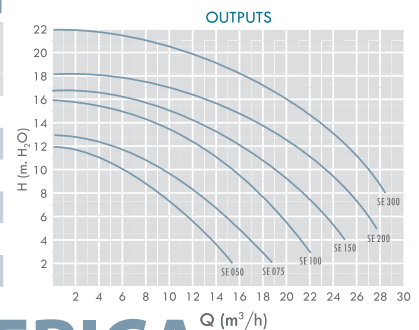

- Self-priming electric pump for swimming pools, with built-in pre-filter.
- Pre-filter with transparent lid in polycarbonate which allows easy observation of the pre-filter basket. The pre-filter is closed by means of a thread, ensuring the perfect adjustment of the lid.
- Pump body made in polypropylene reinforced with fibreglass, resistant to the chemical products in the swimming pool, guaranteed to last a long time.
- Pump body lid and diffuser in Noryl. Impeller in Noryl with shaft in stainless steel.
- Mechanical seal in graphite and ceramics.
- Motor shaft manufactured in stainless steel AISI 316L.
- Enclosed motor, totally silent, with IP-55 protection, at 2.850 r.p.m. Tension of mains feed at 230V-50Hz single-phase or 230/400V-50Hz three-phase.
- Possibility of 60Hz upon request.
- Connections of suction and return at 2 1/4" for Ø 50 mm bush connections.
- Bush connections included with the pump.

پمپ های سری AMERICA

- جنس پروانه نوریل و شفت موتور استیل ۳۱۶L (AISI)
- اتصالات مکش و دهش پمپ مهره ماسوره
- چسبی UPVC می باشد. A

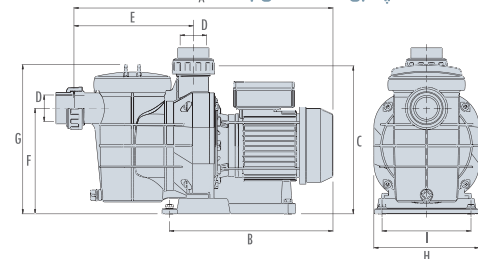

CODE	POWER		DIMENSIONS									WEIGHT GROSS	VOLUME
	kW	CV	A	B	C	D	E	F	G	H	I		
SA033M	0,25	1/3	475	296	280	Ø50	225	200	285	199	168	9,7	0,059
SA050M	0,37	1/2	475	296	280	Ø50	225	200	285	199	168	10	0,059
SA075M SA075T	0,55	3/4	490	311	280	Ø50	225	200	285	199	168	12	0,059
SA100M SA100T	0,75	1	490	311	280	Ø50	225	200	285	199	168	12,5	0,059
SA125M SA125T	1,10	1,5	490	311	280	Ø50	225	200	285	199	168	13,5	0,059

